40 TON HOISTING WINCH

THE NETHERLANDS

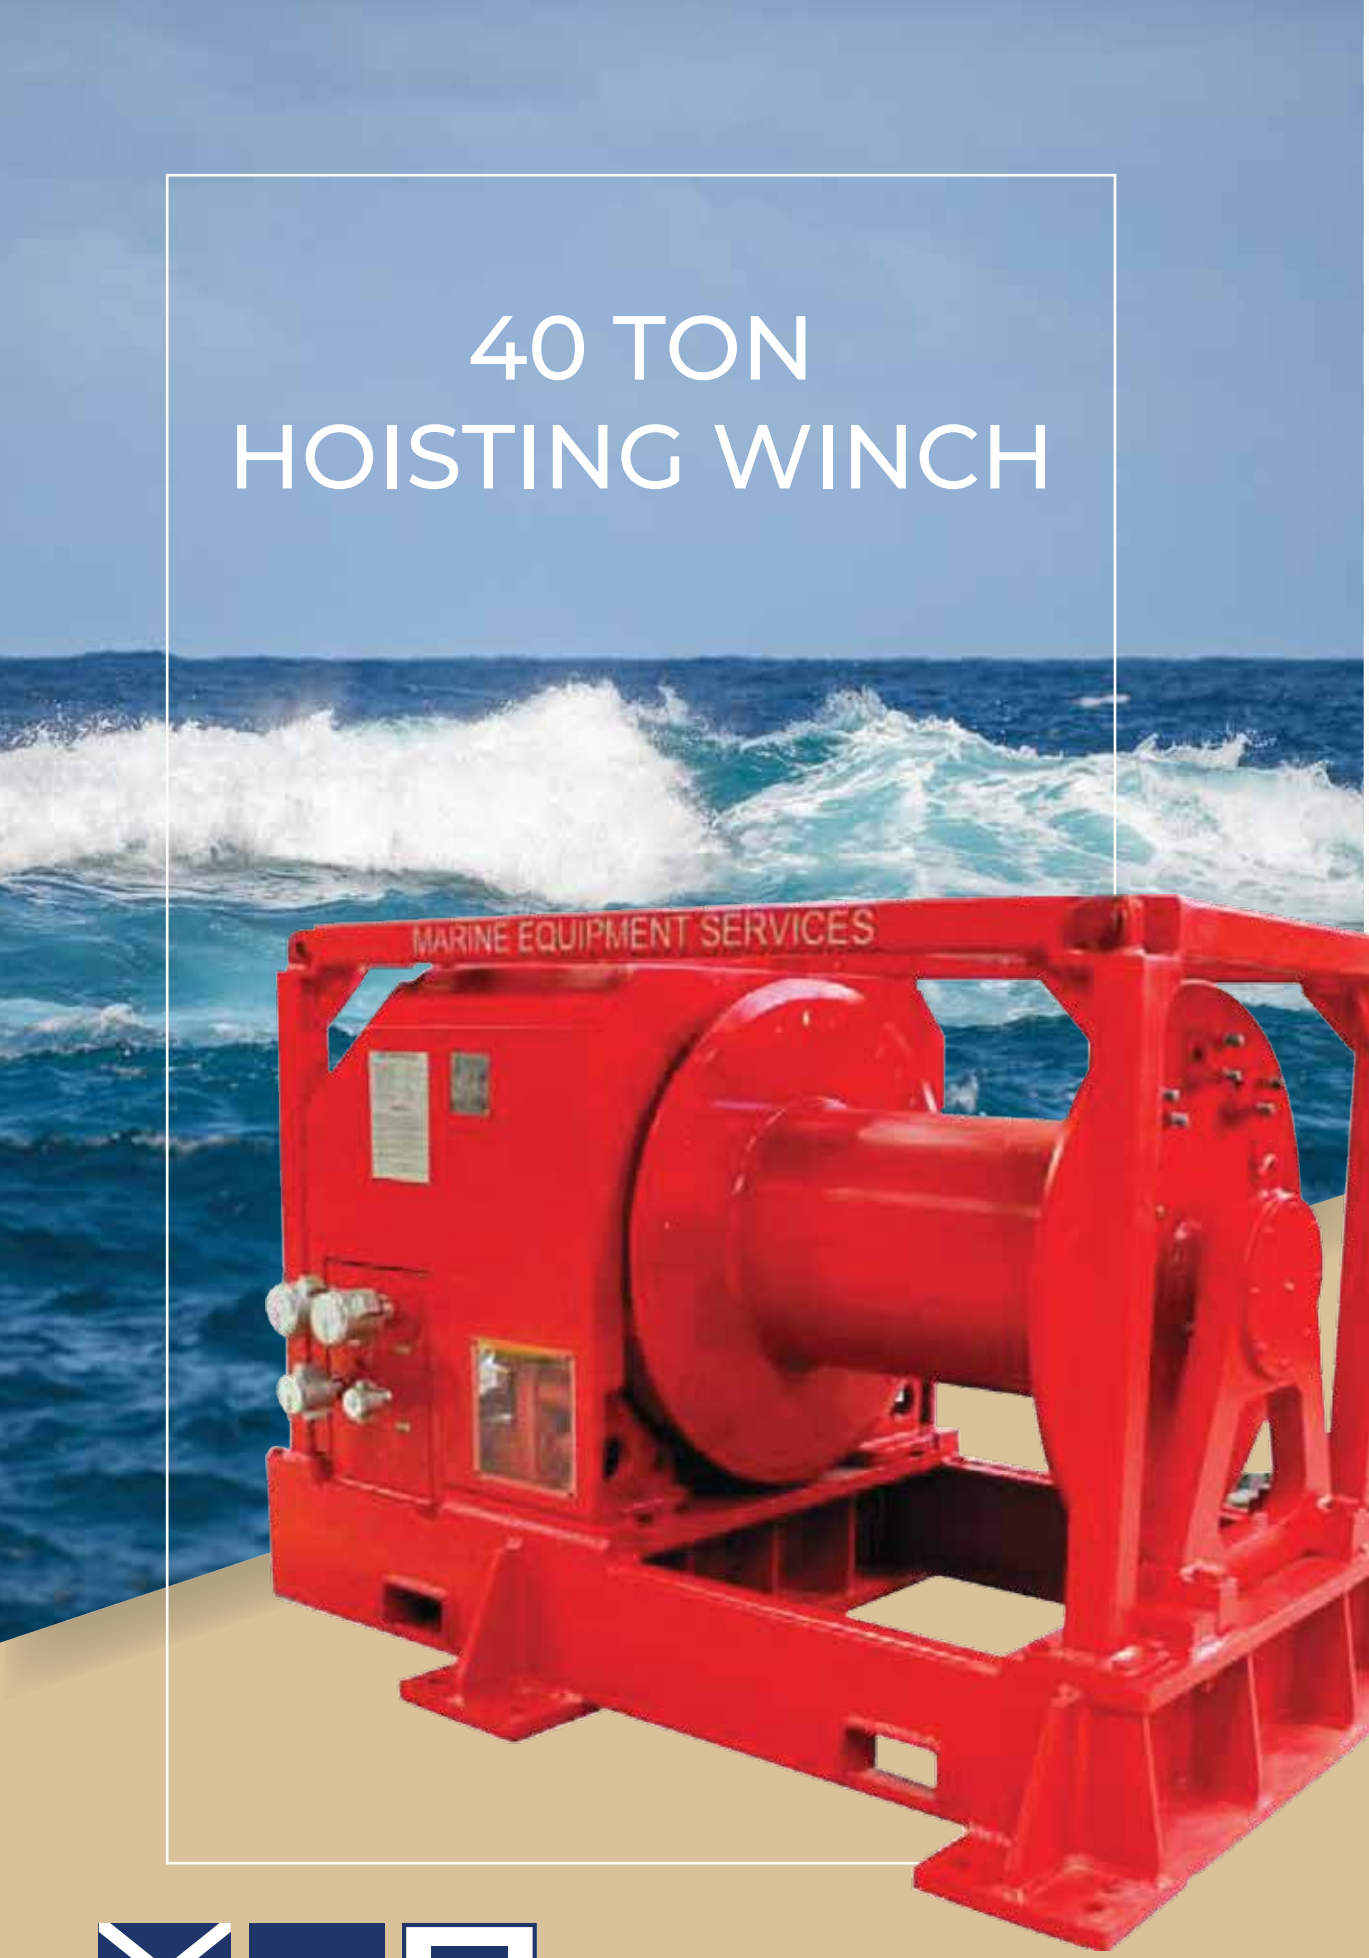

MARINE EQUIPMENT SERVICES

Copyright 2022 @ Marine Equipment Services

WWW.MESTRADING.COM

40 ton hoisting winch

40 ton Hoisting Winches

Specifications for winch on 1st layer	
Pull	400 kN @ 10m / min (Delta p 250 bar)
Slack rope speed	20 m / min @ 200 kN
Brake holding force	500 kN
Diameter	42 mm (steel wire)
Number of layers	8
Length on drum	300 meter
Drive motor	1 x Hydraulic motor, Hagglund motor type MB 84
Oil flow required	206 L / min
Max. working pressure	250 Bar (continuous)
Max. peak pressure	300 Bar

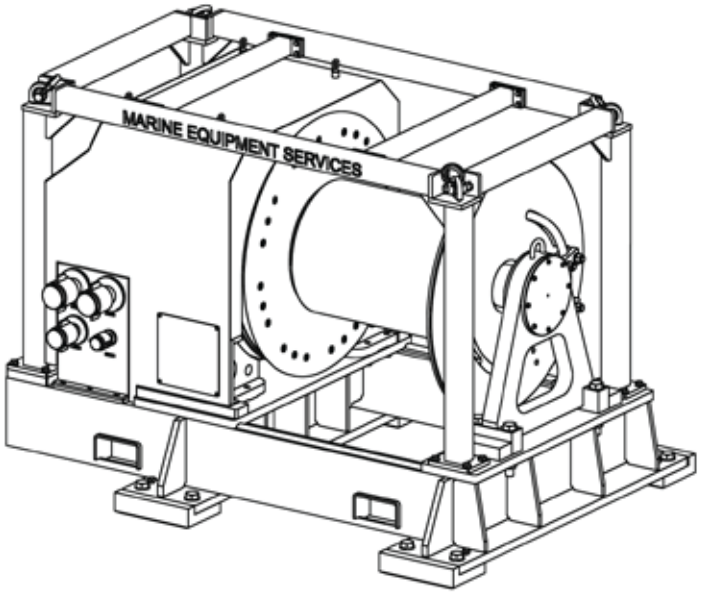

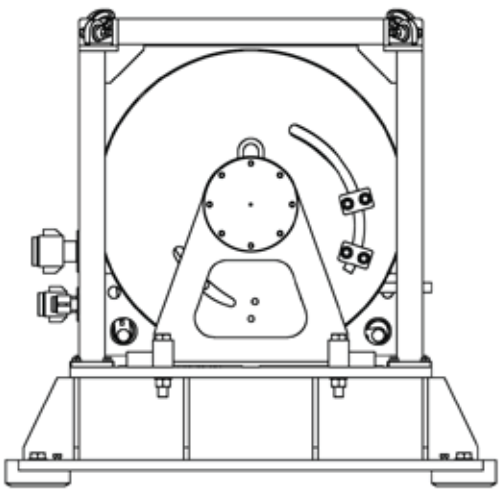

MARINE EQUIPMENT SERVICES B.V.

Phone +31 (0)183 50 20 52, Cellphone: +31 (0) 653 266 524, Fax +31 (0)183 50 16 38
E-mail jvm@mestrading.com - Internet www.mestrading.com

New building
Workboats TH 40
Tomboy 22 & 26

Swivelhead Fairleads
from 18mm up to
76 mm

Electrical and
hydraulical driven
Capstans from
1-20 ton

Hydraulic winches
from 5 up to 20 ton

4Persons TLQ
accommodation
units

5 x 60 ton hydraulic
single drum winches

Universal Roller
Fairleads from
FA4-12 up to
FA4-52

Rubber fenders size
1200 x 2000mm

Diesel hydraulic
Powerpacks

Rubber fenders
with chain and
tyre netting

Universal Roller
Fairleads FA2 series

Complete range of
Deck and Bulwark
mounted Panama
Chocks

Steel anchor buoys
foam filled from
500kgup to 10000kg
buoyancy

EU Fairlead Rollers
from 150mm up to
450mm

Complete range of
MES Dolphin anchors
100kg up to 15,000kg

Complete range of
Smit Brackets
38mm (50t SWL)
114mm (350t SWL)

MARINE EQUIPMENT SERVICES B.V.

Hulsenboschstraat 23
4251 LR Werkendam
The Netherlands
VAT: NL812705233B01

Phone +31 183 502 052
Fax +31 183 501 638
Mobile +31 653 266 524
Chamber of Commerce:11057411

www.mestrading.com

Copyright 2022 @ Marine Equipment Services